



DC High Voltage Probe (To DMM)

High Voltage Probe Dimension Comparison Fig.

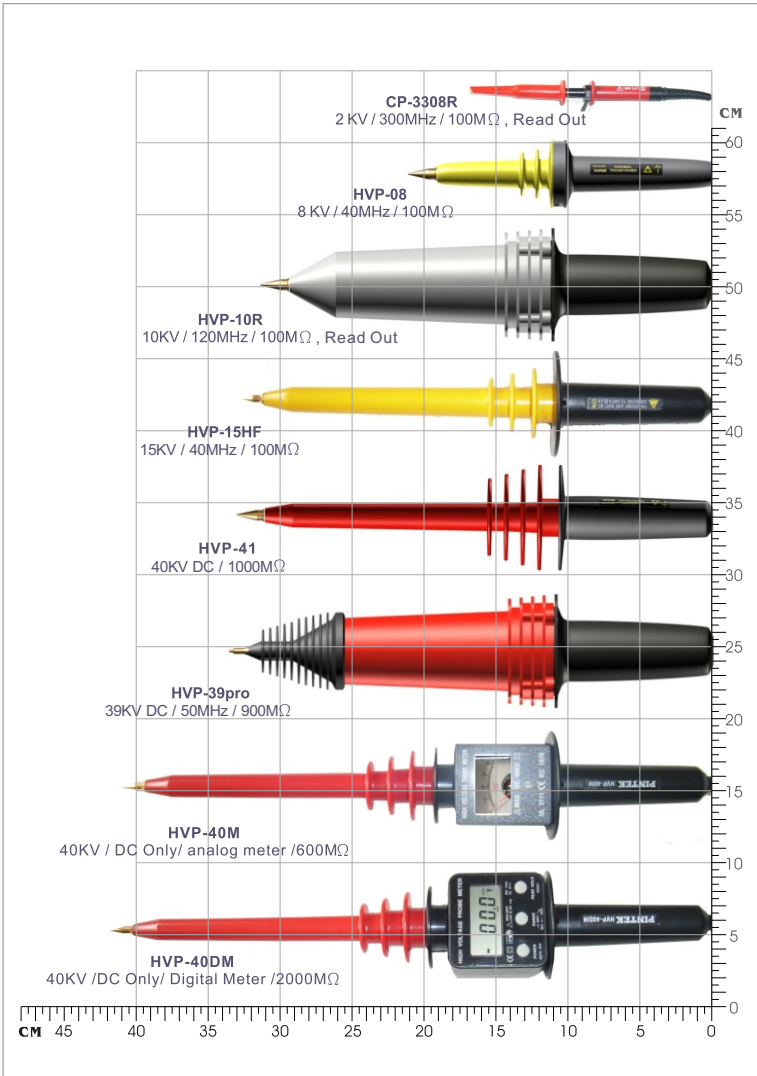



★ **Economic**
1 mV 35MHz Sensitivity

CP-230

- 35MHz Bandwidth.
- 1: 1 Fix
- 300V CAT I



CP-260N

- 60MHz Bandwidth.
- x1, x10
- 600V CAT I

★ **Economic Model!**



CP-360N

- 60MHz Bandwidth.
- x1, x10
- Plastics Insulator

Oscilloscope Probe

CP-2100

- 100MHz Bandwidth.
- x1, x10
- 600V CAT I



CP-2250

- 250MHz Bandwidth.
- x1, x10
- 600V CAT I



CP-2350

- 350MHz Bandwidth.
- x1, x10





CP-3308R

- 300MHz Bandwidth.
- Readout Function
- X100 Fix
- 2000V CAT I

**100:1
2KV
300 MHz**




CP-3101R

- 100MHz Bandwidth.
- Readout Function.
- x10 Fix



CP-3351R

- 350MHz Bandwidth.
- Readout Function.
- x10 Fix

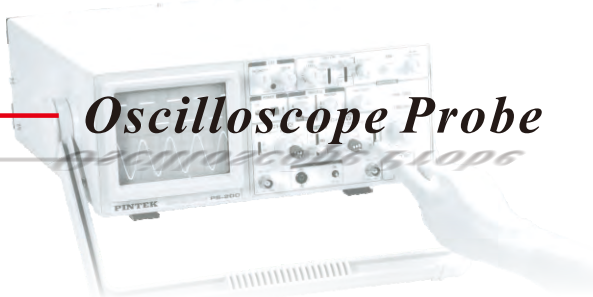

500 MHz

**CP-3501R/pro****500MHz, Precision Oscilloscope Probe**

- Bandwidth: DC-500MHz
- Fix x 10; Readout Function
- EN61010-031, 600V CAT I
- High Speed Rise Time: 0.7ns
- Impedance: 10MΩ
- Position Type: DC Accuracy less than 0.5%

600 MHz

**CP-3601R****600MHz, Precision Oscilloscope Probe**

- Bandwidth: DC-600MHz
- Fix x 10; Readout Function
- EN61010-031, 600V CAT I
- High Speed Rise Time: 0.58ns
- Impedance: 10MΩ
- Position Type: DC Accuracy less than 0.5%



RP-91

- Using On Bench Type LCR Meter.
- Compatible On All Brands Bench Type LCR Meter.
- 4-Wire Leads Compensate Internal Impedance Error.

4 Wires Alligator Clip

RP-92

- High shield rate, low noise design, It remains steady and measurable even the capacitor which is lower than 1pF.
- It supports multiple accessories to suit for different components.
- The probe tip can be replaced to extend the life of the product.
- It is high efficiency and cost effective.
- Cable Length: Approx. 0.8Meter (from connector to probe tip).
- Terminal connection: BNC, 4 terminal-pair.



RP-93

- Low resistance 4 wire terminal-pair probe.
- Compatible on all brands Milli-Ohm meter which input through Banana-Jacket.
- High shield co-axis wire, low noise design.
- Output 1A will not case to heating.
- Gold plate alligator plug, low connect resistance, low corrosive.
- 130 cm length, 90 grms weight.



**BP-250**

BNC Plug to BNC Plug
(50 Ω RG58C UL, 100 cm, 1G Hz, 3A)

**BP-251**

BNC Plug to
Alligator Plug
(RG58C UL, 115 cm,
1G Hz, 3A)

**BP-253N**

Banana Plug to
Alligator Clip
(UL 3239, 18AWG,
6KV DC, 10A, 150°C,
Silicone Wire, 100 cm)

**BP-356N**

Banana Plug to
Banana Plug
(UL 3239, 18AWG,
6KV DC, 10A, 150°C,
Silicone Wire, 60 cm)

**BP-366**

HV Banana Plug to
Banana Plug
(UL 3239, 16AWG,
20KV DC, 10A, 150°C,
Silicone Wire, 60 cm)



BP-256N

IC Clip
(UL 1000V CAT III, 5A)



BP-266N

HV IC Clip
(MAX. 5KV RMS, 5A)



BP-276N

Alligator Clip
(UL 1000V CAT III, 10A)



BP-286N

Test Leader
(UL 94V-2,
1000V CAT III, 10A,
φ 11.5x120mm)




MT-246N

- BNC connects to the specialized adapter of the banana plug.
- PL-10 exclusive accessory.
- Red and Black plastic isolation cover are convenient to recognize positive and negative electrodes.
- The end of banana plug uses beryllium copper to prevent bad connection.
- Accord with CE norm. It is safe and reliable.
- The maximum working voltage 300V CAT2. 3A.1GHz.
- Length: 70mm. Width: 28mm. Weight: 19g.

Accessories

BNC Impedance-thru Terminator

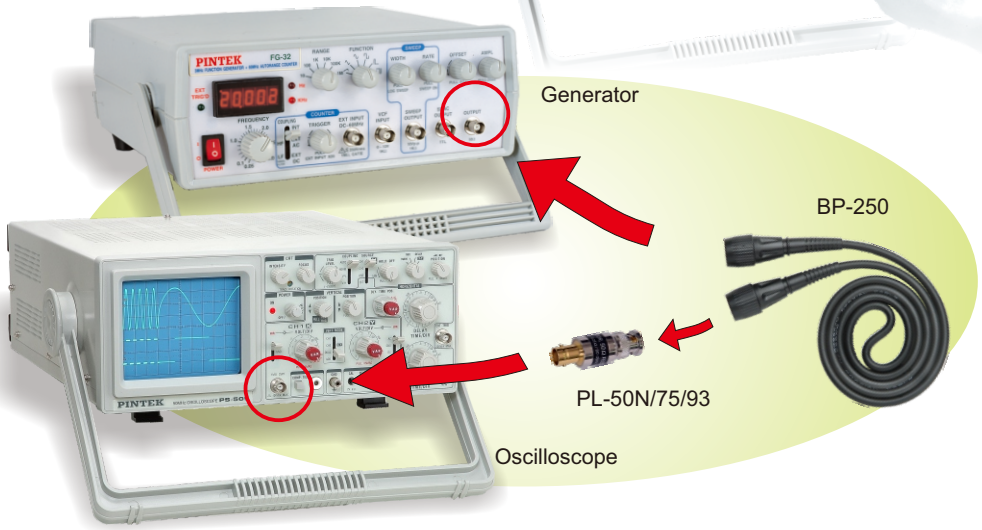

PL-10N

- 1.111 MΩ ± 0.5%
- DC ~ 50MHz
- 1 Watt



PL-75

- 75 Ω ± 0.5%
- DC ~ 1GHz
- 1 Watt



PL-50pro

- 50 Ω ± 1%
- VSWR:
 - < 1.05 (DC~500MHz)
 - < 1.1 (DC~1GHz)



PL-93

- 93 Ω ± 0.5%
- DC ~ 1GHz
- 1 Watt

PRODUCTS CATALOG

PINTEK

Pintek Electronics Co., Ltd

2F No.32 Tai-Pen Rd., Shulin Dist., New Taipei City, Taiwan

台灣新北市樹林區太平路32號2樓

Tel: 886-2-86859562 / 886-2-86859563 / 886-2-86861898

Fax: 886-2-86852081 / 886-2-86861114

<http://www.pintek.com.tw>

E-Mail : pintek@pintek.com.tw ; pintek@ms26.hinet.net



SALES AGENT